


**IP** Cabluri de legare inelare presate (mansonate),  
cu o ramura, conform SR ISO 7531, tip IP  
*Endless slings, with pressed metal sleeve,*  
according to SR ISO 7531

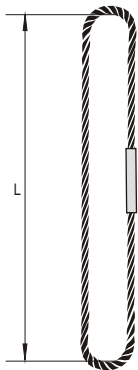

Cablu de legatura  
inelar cu manson  
presat, mat sau zinacat

Exemplu de simbolizare

**IP 10 -3 1,4 tone**

1 2 3 4

- 1 Cablu de legatura inelar, presat
- 2 Diametru cablu (mm)
- 3 Lungimea solicitata (m)
- 4 WLL portanta (tone)

Simbolizare <i>Item name</i>	Diametru cablu <i>Steel wire rope diameter</i> mm	Capacitatea maxima de ridicare (Portanta) <i>WLL</i> <i>Working Load Limit</i> Tone	Lungimea minima <i>Lenght</i> m
IP 6	6	0,49	0,8
IP 8	8	0,9	0,8
IP 10	10	1,4	0,8
IP 12	12	2	0,8
IP 14	14	2,8	1
IP 16	16	3,6	1,2
IP 18	18	4,5	1,2
IP 20	20	5,6	1,6
IP 22	22	6,7	1,6
IP 24	24	8	1,6
IP 26	26	9,5	1,6
IP 28	28	10,6	2
IP 32	32	14	2