




**Cabluri de legare inelare, matisate,
cu o ramura, conform SR ISO 7531, tip IM
Hand Tucked Endless slings,
according to SR ISO 7531**

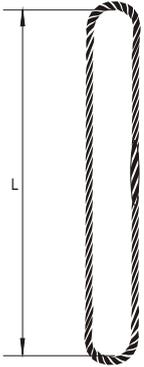

Cablu de legatura inelar matisat, mat sau zincat

Exemplu de simbolizare


IM 20 -12 5,6 tone

1 2 3 4


- 1 Cablu de legatura inelar, matisat
- 2 Diametru cablu (mm)
- 3 Lungimea solicitata (m)
- 4 WLL portanta (tone)

Simbolizare <i>Item name</i>	Diametru cablu <i>Steel wire rope diameter</i> mm	Capacitatea maxima de ridicare (Portanta) <i>WLL</i> <i>Working Load Limit</i> Tone	Lungimea minima <i>Length</i> m
IM 8	8	0,9	0,8
IM 10	10	1,4	0,8
IM 12	12	2	0,8
IM 13	13	2,3	1
IM 14	14	2,8	1
IM 16	16	3,6	1,2
IM 18	18	4,5	1,2
IM 20	20	5,6	1,6
IM 22	22	6,7	1,6
IM 24	24	8	1,6
IM 26	26	9,5	1,6
IM 28	28	10,6	2
IM 32	32	14	2
IM 36	36	18	2,5
IM 40	40	22,4	2,5
IM 44	44	26,5	3
IM 48	48	32	3


Cablurile de legare se executa din cablu de tractiune cu inima vegetala sau metalica, cu cablare in cruce, mate sau, daca se solicita, zincate, negresate, conform ISO 2408, constructie normala 6x19 si 6x37 si constructie combinata 6x31 Seale, avand rezistenta la rupere a sarmei de 1770N/mm².



6x19



6x37



6x31 Seale